

HTC Series CAT6 Unshielded Patch Panel

Panel A – 1U 24 Ports – Moulded Facia

Application/Product Description

The HTC Series Category 6 Patch Panel is designed to support Ethernet 10BASE-T, 100BASE-T (Fast Ethernet), 1000BASE-T (Gigabit Ethernet), 155 Mb/s ATM, Token Ring 4/16, voice/data systems and Voice over Internet Protocol (VoIP) systems running over a Category 6 cabling system and is backwards compatible with legacy Category 5e, Category 5 and voice network infrastructures.

Features and Benefits:

- 1U 24 ports
- 3rd Party Certified for component compliance and POE++
- Steel frame and ABS facia
- Dual use IDC for Krone and 110 insertion tools
- Integral Labelling fields
- Includes rear cable manager, mounting fixings, mini-zip ties and instructions
- Plastic free packaging

Technical Data

Style	Panel A (Moulded Facia) 1U 24 Ports UTP		
Dimensions (mm)	H	W	D
	44	480	31
Compatible Products	HellermannTyton CAT6 Cable and Patchcords		
Material	ABS Facia / Steel Frame		
Weight (g)	600		
Box Quality	1 pc		
Available Colours	Black		
Item Code	HTC-C6U-PP241U/BK/A		



HTC Series CAT6 Unshielded Patch Panel




HTC Series CAT6 Unshielded Patch Panel with Rear Cable Management

Technical Features:

- Conforms to ISO 11801:2002, BS EN 50173, ANSITIA/EIA 568-C.2
- Compatible for both 568A / B Wiring configurations
- Minimum insertions 1000
- Minimum 200 re-terminations
- Accepts 22-24 AWG conductors

Technical Diagrams


1U 24 Port

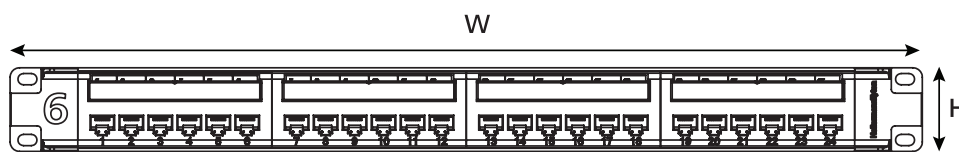

Front view



Top view



Rear view