



G-Wrap 400

Direct Buried/PIA Branch Off Seal

Application/Product Description

The G-WRAP-400MM Seal from HellermannTyton has been designed to seal ducting in any stage of the network. The G-WRAP-400MM is suitable for use with HellermannTyton direct buried and PIA multi-duct within a diameter range of 15mm to 25mm.


The G-WRAP-400MM can also be used with a multi-duct bundle for branching joints where single duct(s) is taken from the bundle and routed to a customer connection point or another fibre connection point within the network.

Features and benefits


- Gel layer provides IP68 seal
- 410mm long
- Low profile
- Suitable for multi-duct diameters 15mm – 25mm
- Quick & easy installation
- Re-openable & re-useable
- UV stable
- Supplied with 8 x HellermannTyton cable ties
- Installation temperature range -30°C to 60°C

Technical Data


Dimensions (mm)	L	W	D
	410	172	15
Duct Size Ø (mm)	15mm - 25mm		
Maximum operating temperature (°C)	-30 - +60°C		

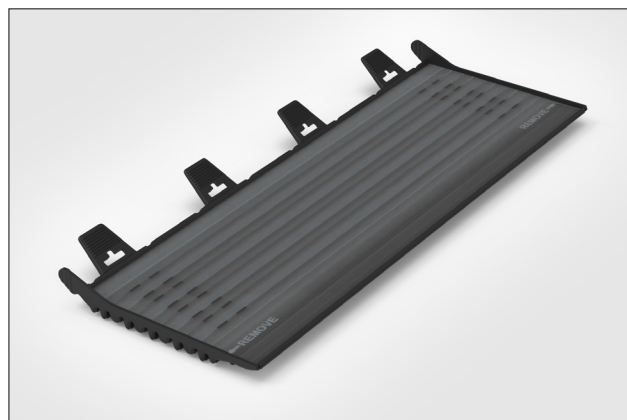

G-Wrap-400mm Seal shown lying flat.

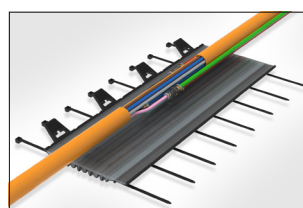

G-Wrap-400mm Seal.

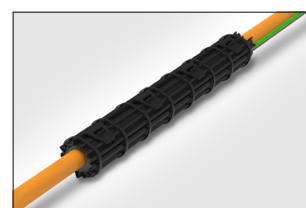


G-Wrap-400mm Seal shown folded.



Branch Spacer Ring.


Technical Diagrams

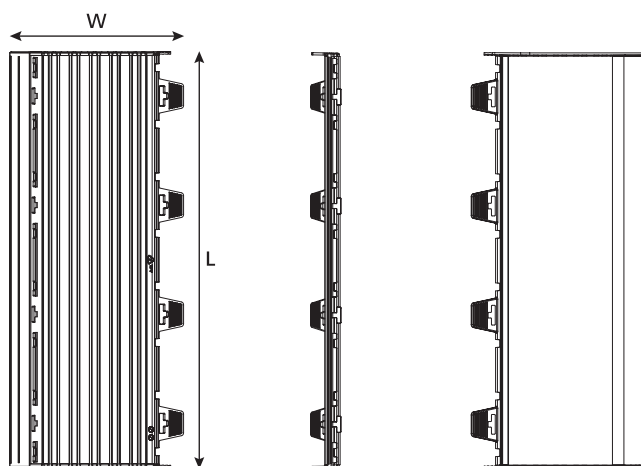

External View

Side View

Internal View



End View