



In data networking the 19" 1u panel is the mainstay of the distribution chain. The new FibreBand 1u sliding tray panel is part of a new, totally flexible system, available in three options:

- Standard 24 port splice panel
- Flexible panel with three changeable front panels
- Three slot in modules.

The tray is locked in place with two, simple to operate plastic catches. When fully extended the tray is designed to lower to 45° to give easy access to the panel. By simply sliding the tray

sideways it can be locked to lower only 10° to provide the perfect working platform during installation or maintenance.

Other features of this panel are gland entry holes for 10mm and 20mm glands complete with cable tie downs for the cable strength member. The panel is also ready for any standard cassette to easily manage the optical fibres.

In addition HellermannTyton have developed multiway brackets that fix multiple panels together to give a unique multiway panel solution.

# Sliding tray Patch Panels

## Optical Fibre Distribution

### ST & FC



ST and FC Patch Panel  
Black sliding tray patch panel for 24 ST and FC adapters.

### SC, MT-RJ, LC, E2000 & MU




SC, MT-RJ, LC, E2000 and MU Patch Panel

Black sliding tray patch panel for 24 SC, MT-RJ, LC and MU adapters.

Note.  
With MT-RJ and LC, 48 fibres are supported.

### Duplex SC & LC Quad

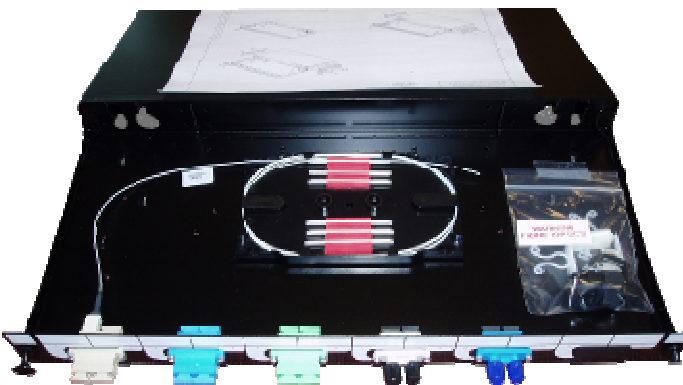

SC and LC Patch Panel

Black sliding tray patch panel for 12 SC duplex or 12 LC Quad adapters.

Note.  
With LC adapters, 48 fibres are supported

Note. Pigtailed, Adapters and wire management are not supplied with the panels, please select items from the relevant section in the Catalogue.



## Wall Boxes

# Optical Fibre Distribution

## Plastic IP55 Wall Box

### Plastic IP55 Wall Box

Plastic wall box rated as IP55 for water and dust ingress. For 16 ST or FC adapters.

Depth	Width	Height
90mm	175mm	225mm



## Metal Lockable Wall Boxes

### Dual door lockable wall box

Lockable wall box for 48 ST or FC connectors.

Depth	Width	Height
90mm	355mm	365mm

Note.  
32 port SC version available to special order.

### Single door lockable wall box

Lockable wall box for 24 ST/FC connectors or 12 SC connectors

Depth	Width	Height
50mm	225mm	270mm



## Standard Metal Wall boxes

### Standard wall boxes in metal and plastic

Three versions of standard wall boxes are available in 4, 8 and 16 fibre versions.



**ALL SC boxes are available with LC or MT-RJ adapters**

Note. Pigtailed are not supplied with the wall boxes, please select items from the relevant section in the Catalogue.


# Optical Fibre Distribution

HellermannTyton can now offer 12 way fibre optic splice cassette. The cassette features mounting holes to accommodate most patch panels available, the cassette is also stackable so that more than one can be fitted to the patch panel. The stacking position is hinged so that when the unit is stacked fibres lower splice cassettes can be reached. The cassette comes complete with inbuilt splices holders to take standard splice protectors.



## Specifications

Width	98mm
Length	160mm
Height	9mm
Minimum bend Radius	> 35mm
Maximum number of fibres	12
Stacking method	Hinged

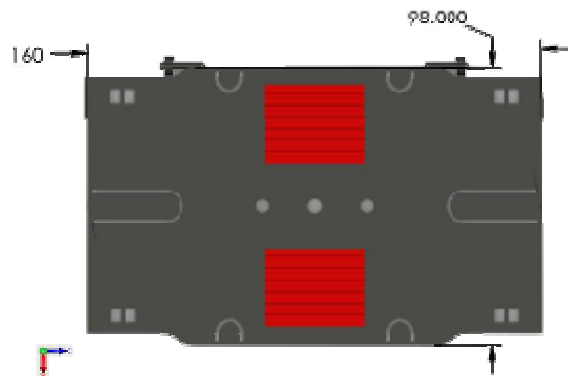

ISO 14001



Certificate No. EMS 504454

HellermannTyton Data Ltd Salthouse Road Cornwell Business Park  
Brackmills Northampton NN4 7EX

Tel +44 (0)1604 707420 Fax +44 (0)1604 705454

Email: sales@htdata.co.uk Home Page: <http://www.htdata.co.uk>

ISO 9001



Certificate No. FM 34289