

RapidNet 6 Port Category 5e

Cassette to Keystone Jack

Application/Product Description

The HellermannTyton Category 5e Cassette to Keystone Jack is pre-terminated with 6 RJ45 ports within the cassette and 6 RJ45 Keystone Jacks at the other end.

The Category 5e RapidNet looms are designed and tested to support Primary (Campus), Secondary (Riser) and Tertiary (Horizontal) applications for 10Base-T (Ethernet), 100Base-T(Fast Ethernet), 1000Base-T(Gigabit Ethernet), PoE and PoE+.

When used with HellermannTyton Category 5e patch panels, outlets and patch leads the combined performance exceeds Category 5e/Class D link and channel requirements.

RapidNet Category 5e looms are available in lengths from 5m to 90m.



RapidNet Category 5e Cassette to Keystone Jack

Cable Specification

Electrical Characteristics @ 20°C	Specification
DC Loop Resistance	≤169Ω/km
Resistance Unbalance	≤2%
Insulation Resistance (500V)	≥2000MΩxkm
Capacitance at 800Hz	Nom. 43nF/km
Capacitance Unbalance (pair to ground)	≤1500pF/km
Characteristic Impedance (1-100MHz)	(100 ± 15)Ω
Nominal Velocity of Propagation	Approx. 66%
Propagation Delay	Nom. ≤427ns/100m
Delay Skew	Nom. ≤12ns/100m
Test Voltage (DC, 1 min) Core/Core	1000v

Cable and Cassette Standards

Cable

- BS EN 50173
- ISO 11801:2002 (inc. Amend. A1 & A2)
- ANSI/TIA/EIA 568-C.2
- IEC 61156-5
- BS EN 50288-10-1

Cable Sheath

- IEC 60332-1
- IEC 60754-2
- IEC 61034


Category 5e Cassette

- ISO 11801:2002 (inc. Amend. A1 & A2)
- BS EN 50173
- ANSI/TIA/EIA 568-C.2

RapidNet Loom Performance Characteristics

Frequency (MHz)		1	10	100
Insertion Loss (dB/100m)	Spec	3.0	6.2	21.0
	Typical	1.6	5.0	16.3
NEXT (dB)	Spec	60.0	48.5	32.3
	Typical	83.5	70.7	54.2
ACR-N (dB)	Spec	57.0	42.3	11.3
	Typical	82.0	65.7	38.0
Return Loss (dB)	Spec	19.0	19.0	12.0
	Typical	27.6	38.1	30.8
PS-NEXT (dB)	Spec	57.0	45.5	29.3
	Typical	78.2	65.0	49.0
PS ACR-N (dB)	Spec	54.0	39.3	8.3
	Typical	76.6	60.0	32.7
ACR-F (dB/100m)	Spec	58.6	38.6	18.6
	Typical	78.0	57.9	39.5
PS ACR-F (dB/100m)	Spec	55.6	35.6	15.6
	Typical	72.3	52.5	34.2

*Typical values are for permanent link tests when using the complete HellermannTyton Data System.




Cassette Specification


Port Count	6		
Dimensions (mm)	H	W	D
	31.0	107.0	130.0
Outlet Style	RJ45		
RJ45 Jack Life	Minimum Insertions 1000		

Cassette Materials		Jack Materials	
Cassette Cover	Polycarbonate ABS	Modular Jack Housing	Polycarbonate/ABS
Colour	Black	Contacts	Copper Alloy/Selected Gold Plate


Technical Diagrams

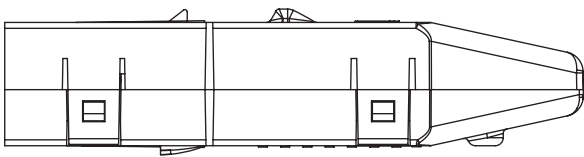

Side view

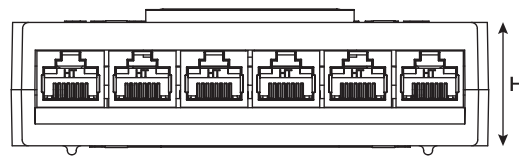

Front view

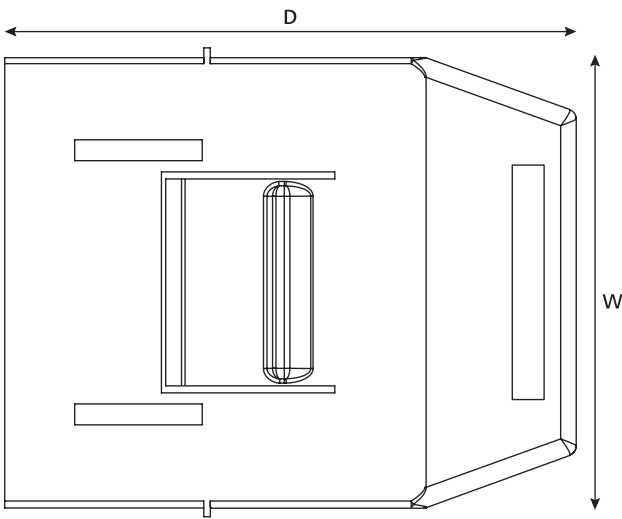

Top view