



POD Boxes

4 Port & 6 Port LJ6C POD Boxes

Application/Product Description

The HellermannTyton POD box offers flexibility within a Structured Cabling Network. POD boxes come unloaded as standard and can be used in conjunction with a range of compatible HellermannTyton outlets & accessories.

Available in either 4 or 6 port presentations with the choice of 25mm, 28.5mm or 34mm conduit entry points. All POD variations benefit from the same dimensions 215mm(h) x 51mm(d) x 62mm(w) which allows them to easily pass through standard 127mm raised floor grommets.

Each POD features individual port labeling fields as well as a larger labelling area for the POD itself. POD boxes can be used without conduit, however HellermannTyton always recommends using suitable flexible conduit to help maintain proper cable bend radii and to protect cables from possible damage. Conduit is gripped within the rear entry point of the POD alleviating the need for a compression gland**.

An integral cable tie point inside the POD allows cable bundles to be securely anchored in place further protecting your terminations.

There are three mounting holes for screws when permanently fixing in position such as to the floor (slab) in grid layouts, and two cable tie points for temporary fixing or when using access baskets; giving a simple means for securing the POD in place under the desk when located in its final position.

** Gland required if using an L bracket to secure conduit to cable tray

Features and Benefits

- IK07 Rated
- Accepts Industry Standard LJ6C
- Available in 4 or 6 Port Presentations
- Choice of 25mm, 28.5mm, 34mm Conduit Entry Points
- Supplied Unloaded as Standard or as part of a RapidNet Pre-Terminated solution
- Works with CAT5E, CAT6 & CAT6A UTP / FTP Cabling Systems
- Fits through 127mm raised floor grommets
- Integral anchor point for cable bundles
- Port and POD labeling fields
- Secure & temporary fixing points



6 Port POD Box- Supplied Unloaded



4 Port POD Box- Supplied Unloaded


Pod Specification

Part Number	No. of Ports	Conduit OD	POD Dimensions	Material
HT-POD-25MM-4P	4 Ports	25mm	215mm (H) x 62mm (W) x 52mm (D)	Black Polycarbonate
HT-POD-28MM-4P		28.5mm		
HT-POD-34MM-4P		34mm		
HT-POD-25MM-6P	6 Ports	25mm		
HT-POD-28MM-6P		28.5mm		
HT-POD-34MM-6P		34mm		

POD	Compatible PolyProp Conduit				
	HellermannTyton	Flexicon	AdaptorFlex	RS Components	Other
HT-POD-25MM-4P	HG-PP25	FPP25	-	755-9035	OD 25mm
HT-POD-28MM-4P	HG-PP28	FPP28	PPFM28	755-9001	OD 28.5mm
HT-POD-34MM-4P	HG-PP34	FPP34	PPFM34	755-9010	OD 34mm
HT-POD-25MM-6P	HG-PP25	FPP25	-	755-9035	OD 25mm
HT-POD-28MM-6P	HG-PP28	FPP28	PPFM28	755-9001	OD 28.5mm
HT-POD-34MM-6P	HG-PP34	FPP34	PPFM34	755-9010	OD 34mm


This document is subject to change without notice.

Further information and datasheets at www.htdata.co.uk/products




Technical Diagrams


6 port

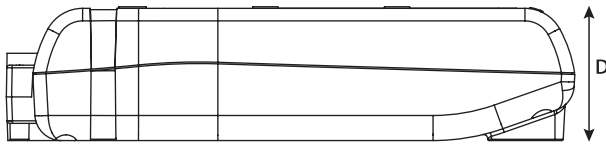

Side view

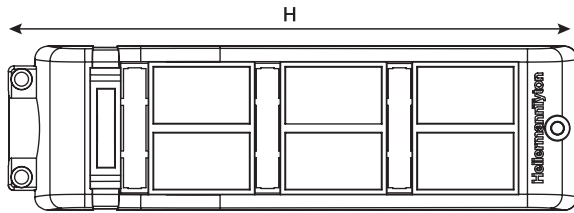


Top view




Front view


4 port

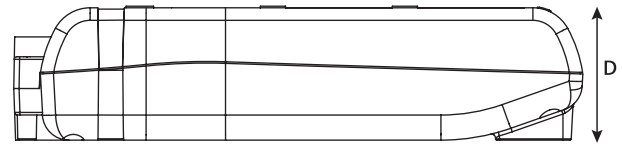

Side view

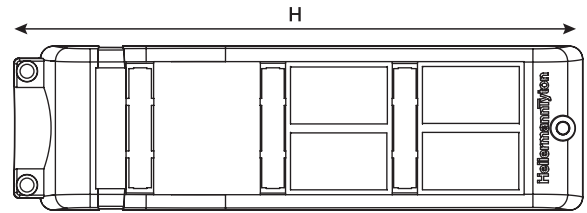

Top view




Front view

HT-POD-34MM-XX

HT-POD-28MM-XX

HT-POD-25MM-XX

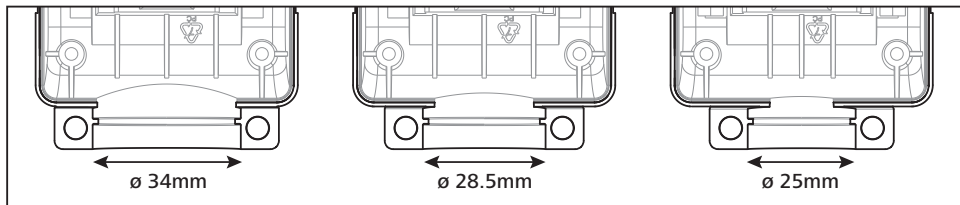

Keystone & Adaptors	
KSJ08SC6A	CAT6A Shielded Keystone Jack
GSTJ6AU	CAT6A Unshielded Keystone Jack
KSJ08SC6	CAT6 Shielded Keystone Jack
GSTJC6U	CAT6 Unshielded Keystone Jack
GSTJ5EU	CAT5e Unshielded Keystone Jack
6C-ANG-PMO/WH	Unloaded Angled LJ6C 38.5x25mm Module - White

Flat & Angled 6C Modules	
6C08IDCNGB-MSK/WH	CAT6 Unshielded LJ6C 38.5x25mm Module - White
6C-ANG-C6/WH	CAT6 Unshielded LJ6C 38.5x25mm Angled Module - White
6C08IDCC5E-MSK/WH	CAT5e Unshielded LJ6C 38.5x25mm Module - White
6C-ANG-C5E/WH	CAT5e Unshielded LJ6C 38.5x25mm Angled Module - White

Accessories	
6C50	Blank LJ6C 38.5x25mm - White
CD001	28.5mm PolyProp Conduit for HT-POD-29MM
CD002	34mm PolyProp Conduit for HT-POD-34MM
6C-ANG-C5E/WH	CAT5e Unshielded LJ6C 38.5x25mm Angled Module - White
LBRKT25/B	Mounting Bracket - 25mm
LBRKT32/B	Mounting Bracket - 32mm