

LC and SC Fibre Panels

1U Multimode and Single mode

Application/Product Description


HellermannTyton fibre adaptors are designed and tested to support 10Base-T (Ethernet), 100Base-T(Fast Ethernet), 1000Base-T(Gigabit Ethernet) networks, telecom, datacom networks and for use in high speed metropolitan and access networks.



1U LC Multimode Panel



1U LC Single Mode Panel



1U SC Multimode Panel




1U SC Single Mode Panel

Technical Data




Adaptor Type	LC Quad		LC Duplex		SC Duplex	
	MM	SM	MM	SM	MM	SM
Maximum No. of Fibres	96		48		48	
No. of U	1					
Dimensions (mm)	H		W		D	
	44		483		200	
Panel Weight (g)	2800					
IP Rating	20					
Cable Entry	20mm	2				
	10mm	4				
Mounting Adjustment Range (mm)	50					
Colour	Black					
Temperature (°C)	Operating	-20 to +50				
	Storage					
Designed in accordance with	<ul style="list-style-type: none"> • IEC 60304 • ISO 11801:2002 (inc. Amend. A1 & A2) • BS EN 50173 • ANSI/TIA/EIA 568-C.2 					

Material	
Panel	1.2mm Electrostatic Powder Coated Cold Rolled Steel





Technical Diagrams

1U LC Panel

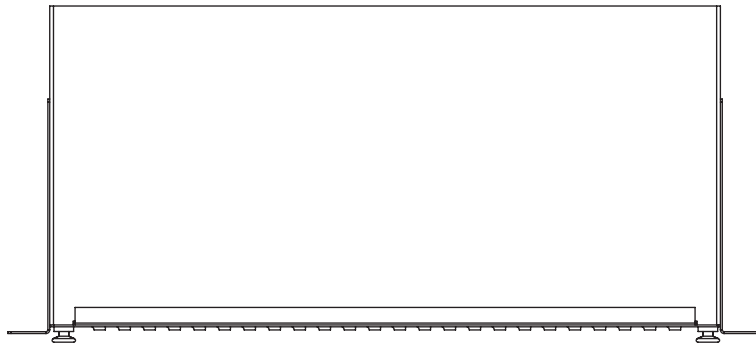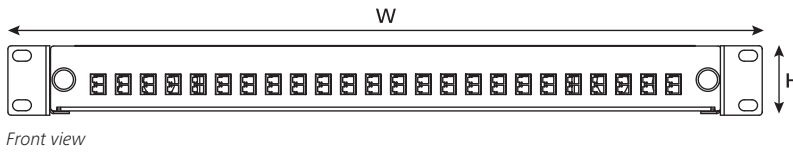

Top view

1U SC Panel

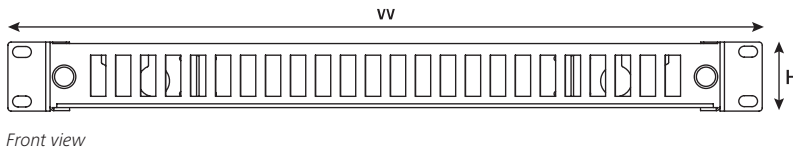

Top view