

SP - SpeedPipe

Direct Installed / Thin Wall / HDPE

Application/Product Description

HellermannTyton's SpeedPipe (SP) is a thin-walled duct manufactured from high quality HDPE material for direct installed (DI) applications into a primary duct network.

The SP is available in a variety of different sizes to suit different air blown fibre cables. To offer a compatible end to end air blown ducted solutions, HellermannTyton manufactures its own inhouse range of connecting and sealing elements.


Features and benefits

- Ideal Primary Main Duct installation
- Optimised for long distance blowing
- Suitable for Push or Pulled installation
- Superior dimensional tolerances
- Very Low Ovality
- Coated with G-Liner, HellermannTyton's Low Friction Liner
- >30 bar burst test
- Made from high quality HDPE
- Translucent to show fibre location in duct



Direct Installed / Thin Wall / HDPE.

Technical Diagrams

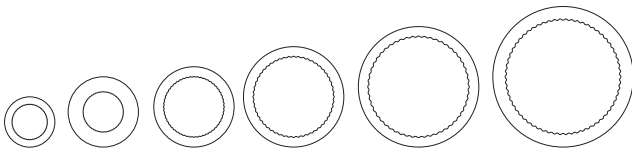

Cross section view of 5/3.5mm, 7/4mm, 8/6mm, 10/8mm, 12/10mm and 14/11.4mm.